
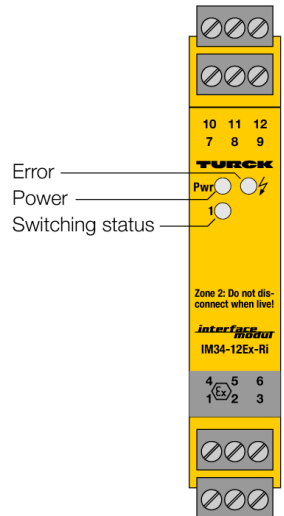


Temperature measuring amplifier 1-channel IM34-12EX-RI

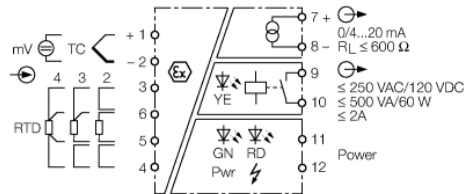

The 1-channel Ex-area temperature measuring amplifier IM34-12EX-RI is designed to evaluate the temperature-dependent changes of Ni100/Pt100 RTDs, thermocouples types B, E, J, K, L, N, R, S and T or low voltages in a range of -100...+160 mV and to output them as temperature-linear current signals 0/4...20 mA.

Alternatively, Ni100/Pt100 RTDs in 2, 3 or 4-wire technology can also be operated at the input circuit of the measuring amplifier. The Ni100/Pt100 input can either be used as external cold junction compensation for the thermocouple or as independent measuring input.

The device has an additional relay output to monitor over or undershoot of a limit value.

The measuring range, limit value and the device functions are set via rotary coding switches or rather slide switches.

The following settings are available:

- Type of probe
- Connection of the Ni100/Pt100 resistor in 2, 3 or 4-wire technology
- Measuring range, start -100...- 1 °C in 1-K steps, 0...990 °C in 10-K steps
- Limit value
- Measuring range, end 0...1990 °C in 10-K steps
- Input circuit monitoring for wire-break
- Behaviour of the current output in case of errors in the input circuit: 0 or > 22 mA
- Internal or external cold junction compensation
- Relay output mode

The signals are transformed according to ITS 90/IEC 584 for thermocouples and according to IEC 751 for Pt100 RTDs and provided temperature linear at the current output.

- ATEX, IECEx, cFM_{us}, UL, TR CU, IN-METRO, CCOE
- Installation in zone 2
- Input for Pt100/ Ni100 resistors, thermocouples and millivolt signals in 2, 3 or 4-wire technology
- Output circuit: 0/4...20 mA, limit value relay
- Upper and lower limit adjustable via rotary coding switch
- Complete galvanic isolation


Temperature measuring amplifier

1-channel


IM34-12EX-RI

Type designation	IM34-12EX-RI
Ident no.	7506631
Nominal voltage	Universal voltage supply unit
Operating voltage	20...250 VAC
Frequency	40...70 Hz
Operating voltage range	20...125 VDC
Power consumption	≤ 3 W
Input circuits	intrinsically safe acc. to EN 60079
	Thermocouple
	Ni100
	Pt100
	mV signals
Pt100	(IEC 751), 2, 3 and 4-wire technology
Ni100	(DIN 43760), 2, 3 and 4-wire technology
Probe current	≤ 0.2 mA
Thermocouples	B, E, J, K, N, R, S, T (ITS 90/IEC 584), L (DIN 43710)
Voltage input	-0.160...+0.160 VDC
Output circuits	
Output current	0/4...20 mA
Load resistance, current output	≤ 0.6 kΩ
Fault current	0 / 22 mA adjustable
Output circuits (digital)	1 x relays (NO)
Output switching voltage relay	≤ 30 VDC / ≤ 250 VAC
Switching current per output	≤ 2 A
Switching capacity per output	≤ 500 VA/60 W
Switching frequency	≤ 10 Hz
Contact quality	AgNi, 3μ Au
Output	Adjustable output mode
Rise time (10-90%)	≤ 1000 ms
Dropout time (90...10%)	≤ 1000 ms
Reference temperature	23 °C
Accuracy current output	± 5 μA
Temperature drift analog output	0.0025 %/K
Accuracy RTD input	± 50 mΩ
Temperature drift RTD input	± 3 mΩ/K
Accuracy TC input	± 15 μV
Temperature drift TC input	+/- 3.2 μV / K (of 320mV)
Cold junction compensation error	2-wire < 100mΩ after line compensation 3-wire < 100mΩ with asymmetrical wiring 4-wire < 50mΩ with cold junction compensation < 2 K with IM-3-CJT < 1K
Galvanic isolation	
Test voltage	2.5 kV
Important note	For Ex-applications the values specified in the corresponding Ex certificates (ATEX, IECEx, UL, etc.) apply.
Ex approval acc. to conformity certificate	TÜV 02 ATEX 1898
Application area	II (1) G, II (1) D
ignition protection category	[Ex ia Ga] IIC ; [Ex ia Da] IIIC ;
Max. values:	Terminal connection: 1...6
Ex approval acc. to conformity certificate	TÜV 06 ATEX 552978 X
Application area	II 3 G
Ignition protection type	Ex nA nC [ic Gc] IIC T4
Max. values:	Terminal connection: 1...6
Characteristic	linear
Indication	
Switching state	yellow


Dimensions



Output relay – Load curve

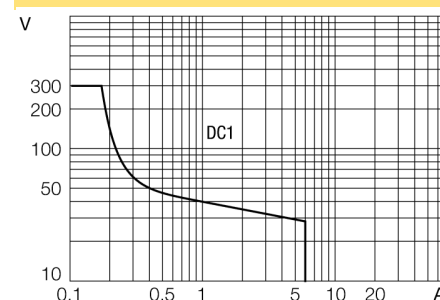

Output relay – Electrical lifetime




Temperature measuring amplifier
1-channel
IM34-12EX-RI

Protection class	IP20
Flammability class acc. to UL 94	V-0
Ambient temperature	-25 ... +70 °C
	-25 ... +60 °C für UL, FM
Storage temperature	-40...+80 °C
Dimensions	104 x 18 x 110 mm
Weight	157 g
Mounting instructions	DIN rail (NS35) or panel
Housing material	Polycarbonate/ABS
Electrical connection	4 x 3-pin removable terminal blocks, reverse polarity protected, screw connection
Terminal cross-section	1 x 2.5 mm ² / 2 x 1.5 mm ²
Tightening torque	0.5 Nm

Temperature measuring amplifier
1-channel
IM34-12EX-RI

Accessories

Type code	Ident no.	Description	
IM-CC-3X2BU/2BK	6900475	Cage clamp terminals for IM modules (Ex-devices with 18 mm overall width); includes: 2 pcs. 3-pin blue terminals and 2 pcs. 3-pin black terminals.	
IM-3-CJT	6900524	Cold junction compensation module for IM 34 temperature measuring amplifiers, width 18 mm	