

NO2-A43F Nitrogen Dioxide Sensor 4-Electrode



Figure 1 NO2-A43F Schematic Diagram			Patented
ŀ	• Ø10 +	Ø20,2 Including label	
	13.5 1		
	Reference		
MITROGEN DIOAL 10			
		₩02-A43F 123455 ⁴ 123	
	~~~		
	<ul> <li>Sensing area</li> <li>Do not obscur</li> </ul>		s
	Ø16		
-			
		ensions in millimetres (± 0.15mm)	
Top Vi	ew	Bottom View Side View	
PERFORMAN		n A /nnm of 2nnm NO	175 to 150
	Sensitivity Response time	nA/ppm at 2ppm NO ₂ t ₉₀ (s) from zero to 2ppm NO ₂	-175 to -450 < 60
	Zero current	nA in zero air at 20°C	-50 to +70
	Noise*	±2 standard deviations (ppb equivalent)	15
	Range	ppm NO ₂ limit of performance warranty	20
	Linearity	ppm error at full scale, linear at zero and 20ppm NO,	< ±0.5
	Overgas limit	maximum ppm for stable response to gas pulse	50
	* Tested with Alpha	sense AFE low noise circuit	
LIFETIME	Zero drift	ppb equivalent change/year in lab air	0 to 20
	Sensitivity drift	% change/year in lab air, monthly test	< -20 to -40
	Operating life	months until 50% original signal (24 month warranted)	> 24
ENVIRONMENTAL			
		C (% output @ $-20^{\circ}$ C/output @ $20^{\circ}$ C) @ 2ppm NO ₂	40 to 80
		C (% output @ 50°C/output @ 20°C) @ 2ppm $NO_2$	95 to 115
	Zero @ -20°C Zero @ 40°C	nA nA	0 to +25 20 to 60
			20 10 60
CROSS	O ₃	Filter capacity (ppm hrs) @ 2ppm O ₃	> 500
SENSITIVITY	H ₂ S	sensitivity % measured gas @ 5ppm H ₂ S	< -80
	NÔ	sensitivity % measured gas @ 5ppm NO	< 5
	Cl ₂	sensitivity % measured gas @ 5ppm Cl ₂	< 75
	SO ₂	sensitivity % measured gas @ 5ppm SO ₂	< -5
	CO	sensitivity % measured gas @ 5ppm CO	< -5
	$C_2H_4$	sensitivity % measured gas @ 100ppm $C_2H_4$	< 1
	NH ₃	sensitivity % measured gas @ 20ppm NH ₃	< 0.2
	$H_2$ CO ₂	sensitivity % measured gas @ 100ppm H ₂ sensitivity % measured gas @ 5% Vol CO ₂	< 0.1 0.1
	Halothane	sensitivity % measured gas @ 5% Vol CO ₂ sensitivity % measured gas @ 100ppm Halothane	nd
KEY SPECIFICATIONS			
	Temperature range		-30 to 40
	Pressure range	kPa	80 to 120
	Humidity range	% rh continuous months @ 3 to 20°C (stored in sealed pot)	15 to 85
	Storage period Load resistor	$\Omega$ (AFE circuit recommended)	6 33 to 100
	Weight	g	< 6
×	•	-	
At the end instrument	or the product's life, do not manufacturer, Alphasense of	dispose of any electronic sensor, component or instrument in the domestic war its distributor for disposal instructions.	ste, but contact the

NOTE: all sensors are tested at ambient environmental conditions, with 47 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

Alphasense Ltd, Sensor Technology House, 300 Avenue West, Skyline 120, Great Notley. CM77 7AA. UK Telephone: +44 (0) 1376 556 700 Fax: +44 (0) 1376 335 899 E-mail: sensors@alphasense.com Website: www.alphasense.com



## **NO2-A43F Performance Data**

## Figure 2 Sensitivity temperature dependence



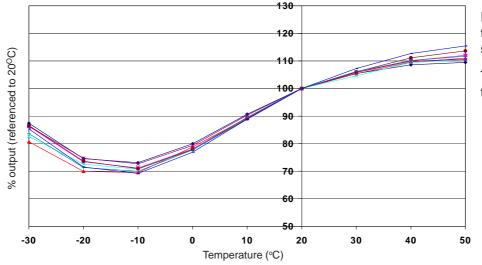


Figure 2 shows the temperature dependence of sensitivity at  $2ppm NO_2$ .

This data is taken from a typical batch of sensors.

## Figure 3 Zero temperature dependence

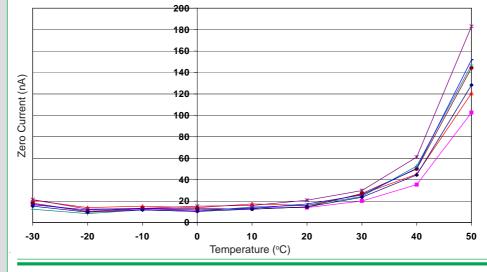


Figure 3 shows the variation in zero output of the working electrode caused by changes in temperature, expressed as nA.

This data is taken from a typical batch of sensors.

Contact Alphasense for futher information on zero current correction.

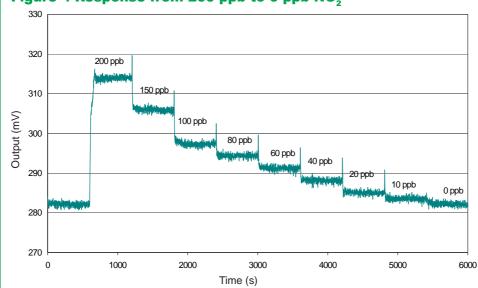


Figure 4 Response from 200 ppb to 0 ppb NO₂

Figure 4 shows response from from 200ppb  $NO_2$  to 0ppb  $NO_2$ .

Use of Alphasense AFE circuit reduces noise to 15ppb, with the opportunity of digital smooting to reduce noise even further.

Offset voltage is due to intentional AFE circuit electronic offset.

For further information on the performance of this sensor, on other sensors in the range or any other subject, please contact Alphasense Ltd. For Application Notes visit "www.alphasense.com".

In the interest of continued product improvement, we reserve the right to change design features and specifications without prior notification. The data contained in this document is for guidance only. Alphasense Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within. (©ALPHASENSE LTD ) Doc. Ref. NO2-A43F/APR16