

Pleated Media for Increased Capacity & Long Service Life

Betafine™ DP series pleated polypropylene filters are available with absolute ratings from 0.2 to 70 microns. The all polypropylene filter is used extensively on corrosive and non-corrosive process fluids where broad chemical compatibility is required.

The vast surface area of the pleated filter matrix provides increased flow, high contaminant loading capacity and low initial pressure drop. This construction permits the use of smaller housings and reduced capital expenditure. Betafine DP series filter cartridges are available in lengths to 40" with a wide variety of end modifications to fit most filter housing designs.

Filter Capsules

Betafine DP series filter capsules are designed for critical, small volume filter applications in the coatings, fine chemicals, pharmaceuticals and microelectronics markets. They contain pleated, absolute-rated, polypropylene filter media providing excellent retention of particles at fast flow rates.

Performance

Betafine DP series filter cartridges are ideally suited for high flow, low viscosity fluids.

Flow Rates

The Betafine DP series filter cartridge construction is optimized to obtain the highest flow rates while maintaining the defined particle

Features & Benefits

Precision Engineered, Absolute Rated, Pleated Filter

- Consistent, repeatable filtration, improving effluent quality
- Help provide consistent performance

Pleated Media for Greater Surface Area

- Longer service life compared to non-pleated media
- Less down time due to fewer filter change-outs
- Lower total filtration operating costs

High Flow Rates with Lower Pressure Drops

- Exceptional throughput, reduced processing time and reduced processing costs

Thermally Bonded, 100% Polypropylene Construction

- Broad chemical and thermal compatibility
- No media migration

FDA, CFR 21 Listed Materials of Construction

- Suitable for a broad range of applications, including food, beverage and pharmaceutical applications

Filter Capsules Offer


- Sanitary vent and drain valves for ease of use
- Compact design with a variety of end connections




Applications

Betafine™ DP Series filters offer superior chemical resistance and durability in demanding process applications.


Coatings	Maintaining high quality in feed streams and intermediates.
Electronics	RO/DI prefiltration, electroplating baths, process/rinse water, solvent, specialty coatings.
Food & Beverage	Potable water, process and blending water, and diatomaceous earth trap filtration in food and beverage applications.
Pharmaceutical	Prefiltration, final filtration of process water, air and gas prefiltration, chemical intermediates, bulk pharmaceutical chemicals, and solvents.
Industrial Process	Filtration of intermediates, fine chemicals, and photographic chemicals, reagent grade chemicals, high purity chemicals, oil and gas processing, secondary water filtration, and process gases.

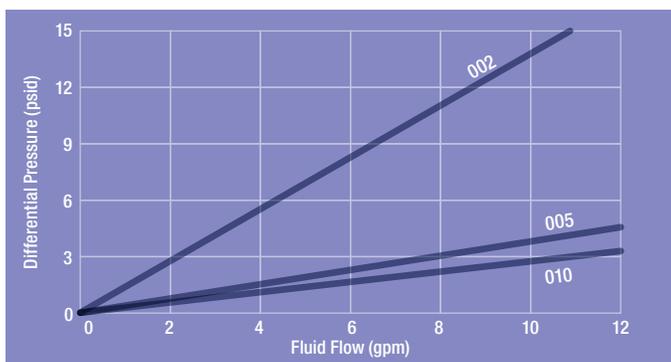


Graph 1. Typical Flow Rates for Grades 002, 005 & 010 Betafine™ DP Series 10" Filter Cartridges

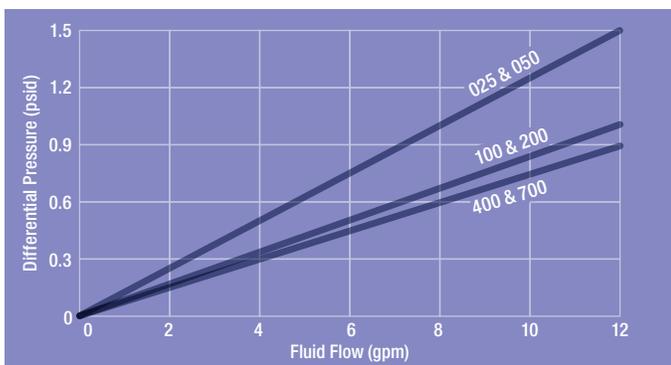

Graph 2. Typical Flow Rates for Grades 025, 050, 100, 200, 400 & 700 Betafine™ DP Series 10" Filter Cartridges

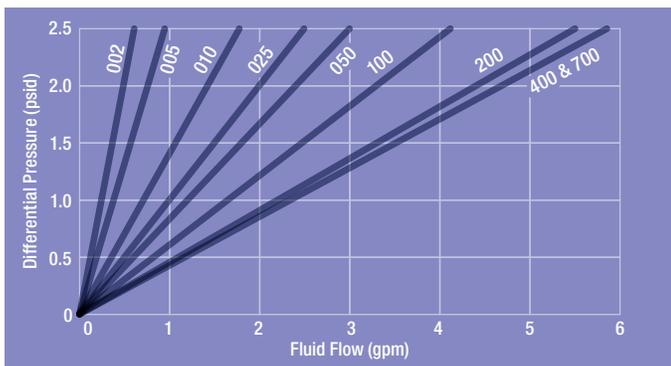

Graph 3. Water Flow Rates for 2.5" Betafine™ DP Series Filter Capsules with 1.5" Sanitary Flanges @ 20 °C

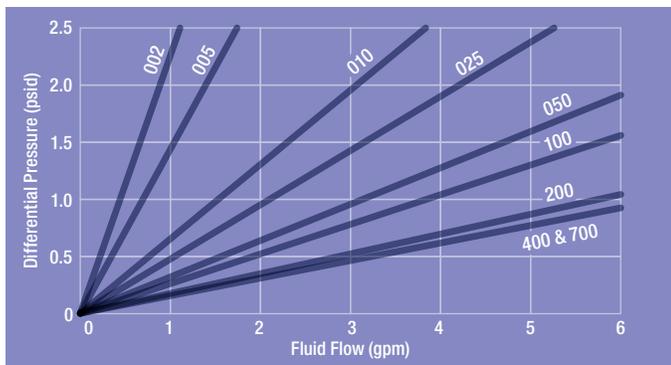

Graph 4. Water Flow Rates for 5" Betafine™ DP Series Filter Capsules with 1.5" Sanitary Flanges @ 20 °C

reduction efficiencies. The flow rates shown in Graphs 1 and 2 are for 10" cartridges. Graphs 3 and 4 show typical water flow rates for Betafine™ DP series filter capsules with 1.5" sanitary flange connections. Other end connections may affect maximum flow rates, see Table 1 below.

Table 1. Betafine™ DP Series Filter Capsules Maximum Recommended Flow Rate By End Connection

End Connection	Maximum Recommended Flow Rate (gpm)	Housing Pressure Loss (psid)*
0.5" Sanitary Flange	6.0	1.0
0.375" FNPT	6.0	1.0
0.5" Hose Barb	3.0	1.5
0.25" MNPT	1.5	2.4
Tapered Hose Barb	0.5	2.2

* At maximum recommended flow rate

Betafine™ DP Series Filter Reduction Ratings

Consistent filtration performance, throughout the life of the filter, is the key in determining reduction efficiency. Absolute ratings for Betafine DP series filters are determined using a filter performance test developed by 3M Purification Inc., an adaptation of the general procedures outlined in ASTM STP 975. 3M Purification Inc. defines absolute ratings as the particle size (x) providing a Beta Ratio (β_x) = 1000 as measured over the life of the filter. At this Beta Ratio, the reduction efficiency is equal to 99.9%.

Table 2. Betafine™ DP Series Filters Representative Reduction Ratings

Betafine DP Series Filter Grade	Reduction Rating (μm)	
	Absolute*	Nominal
002	0.2	—
005	0.5	—
010	1	0.2
025	2.5	0.45
050	5	1
100	10	3
200	20	5
400	40	10
700	70	25

* Absolute Reduction Rating (μm) Beta 1000




Betafine™ DP series filters are available in 3M Purification Inc. CTG-Klean packs, a convenient, self-contained filter pack system designed to reduce change-out and clean-up time, and help reduce operator exposure to chemicals and solvents.

Operating Parameters & Specifications


	Cartridges								Capsules	
Filter Rating	0.2 – 70 µm								0.2 – 70 µm	
Dimensions										
Nominal Length (see ordering guide)	9.75"	10"	19.5"	20"	29.25"	30"	39"	40"	2.5"	5"
- With End Connection A	N/A								5"	7.5"
- With End Connection B									5.5"	8"
- With End Connection C									5"	7.5"
- With End Connection D									5"	7.5"
- With End Connection E									5.25"	7.75"
Diameter, Outer (nominal)	2.63"								3"	
Diameter, Inner (nominal)	1.09"								N/A	
Width (to vent)	N/A								2.75"	
Materials of Construction										
Filter Media	Polypropylene								Polypropylene	
Support Layers										
Inner Core & Outer Cage (cartridge) or Capsule Body										
End Cap Adapters & Adapters										
Flat Gasket	Standard: Ethylene Propylene (EPR) Optional: Silicone, Fluorocarbon, Nitrile & Polyethylene								N/A	
O-rings	Standard: Silicone Optional: Fluorocarbon, Ethylene Propylene (EPR), Nitrile & FEP/PFA-encapsulated Fluorocarbon								Silicone, Fluorocarbon & Ethylene Propylene (EPR)	
Filtration Surface Area	N/A								1.0 ft ² (929 cm ²)	2.0 ft ² (1,858 cm ²)
Operating Conditions										
Maximum Operating Pressure	N/A								75 psig	
Maximum Differential Pressure	80 psid @ 70 °F (5.5 bar @ 21 °C)								60 psid @ 104 °F (4.1 bar @ 40 °C)	
	60 psid @ 104 °F (4.1 bar @ 40 °C)									
	50 psid @ 150 °F (3.4 bar @ 66 °C)									
	35 psid @ 175 °F (2.4 bar @ 80 °C)									
Recommended Change-out Differential Pressure	35 psid (2.4 bar) @ 77 °F (25 °C)								35 psid (2.4 bar) @ 104 °F (40 °C)	
Maximum Operating Temperature	175 °F (80 °C)								104 °F (40 °C) Do not <i>in-situ</i> steam or autoclave	

Materials of Construction

Betafine™ DP series filter cartridges are constructed from 100% polypropylene and pleated for increased surface area. The migration-free media is supported both upstream and downstream by polypropylene support materials. To provide a structurally integral cartridge, the cartridge end cap adapters are thermally bonded to the inner core and outer cage as well as the pleated edge of the media and support materials. Multiple cartridge lengths, of various end cap adapters, are produced using the same thermal bonding technique. This eliminates the use of adhesives and cartridge housing adapters to provide users with a cost-effective alternative without housing change-out.

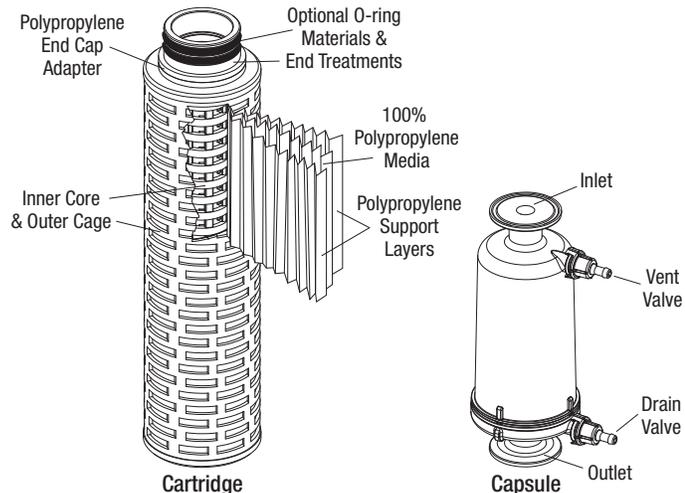

Betafine™ DP Series Ordering Guide

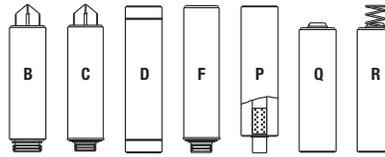

Cartridges

Cartridge Code	Nominal Length Code	Filter Media Code	Grade Code & Rating	End Modification Code	O-ring Material Code
DP	*09 9.75"	PP — Polypropylene	002 (0.2 µm)	B — Bayonet Lock Single Open End (SOE) (226 O-ring & Spear) C — SOE Push-in Type (222 O-ring & Spear) D — Double Open End (DOE) F — SOE Push-in Type (222 O-ring & End Cap Adapter) P — DOE (w/ Polypropylene Core Extender) Q — SOE (End Cap Adapter w/o Spring)** R — SOE (End Cap Adapter w Spring)	A — Silicone B — Fluorocarbon C — EPR D — Nitrile G — Polyethylene H — Clear Silicone K — FEP/PFA-encapsulated Fluorocarbon L — FEP/PFA-encapsulated Silicone
	10 10"		005 (0.5 µm)		
	*19 19.5"		010 (1 µm)		
	20 20"		025 (2.5 µm)		
	*29 29.25"		050 (5 µm)		
	30 30"		100 (10 µm)		
	*39 39"		200 (20 µm)		
	40 40"		400 (40 µm) 700 (70 µm)		

* Available in P & D end modifications only.

** Can be used as a replacement for cartridge with "R" end modification.

Capsules

Capsule Code	Grade Code & Rating	Configuration Code	Nominal Length Code	End Connection Code	Vent O-ring Material Code	Packaging Code
DP	002 (0.2 µm)	C — Capsule	01 2.5"	A — 1.5" Sanitary Flange B — 0.5" (14 mm) hose barb C — 0.25" MNPT D — 0.375" FNPT E — 0.25"-0.3125"-0.375" Tapered Hose Barb	A — Silicone B — Fluorocarbon C — EPR	01 — Single Pack 02 — 3 Pack 03 — 20 Pack
	005 (0.5 µm)		02 5"			
	010 (1 µm)					
	025 (2.5 µm)					
	050 (5 µm)					
	100 (10 µm)					
	200 (20 µm)					
	400 (40 µm) 700 (70 µm)					

Important Notice

The information described in this literature is accurate to the best of our knowledge. A variety of factors, however, can affect the performance of the Product(s) in a particular application, some of which are uniquely within your knowledge and control. **INFORMATION IS SUPPLIED UPON THE CONDITION THAT THE PERSONS RECEIVING THE SAME WILL MAKE THEIR OWN DETERMINATION AS TO ITS SUITABILITY FOR THEIR USE. IN NO EVENT WILL 3M PURIFICATION INC. BE RESPONSIBLE FOR DAMAGES OF ANY NATURE WHATSOEVER RESULTING FROM THE USE OF OR RELIANCE UPON INFORMATION.**

It is your responsibility to determine if additional testing or information is required and if this product is fit for a particular purpose and suitable in your specific application.

3M PURIFICATION INC. MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE HEREUNDER WITH RESPECT TO INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS.

Limitation of Liability

3M Purification Inc. will not be liable for any loss or damage arising from the use of the Product(s), whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation may not apply to you.

Your Local Distributor:

LENNTECH

info@lennotech.com Tel. +31-152-610-900

www.lennotech.com Fax. +31-152-616-289



Please recycle. Printed in U.S.A.
 3M is a trademark of 3M Company.
 Betafine is a trademark of 3M Company used under license.
 © 3M 2011. All rights reserved.
 70-0201-8617-0 REV 0911

DP09PP002P	DP19PP002P	DP29PP002P	DP39PP002P	DP002C01A	DP100C01A
DP09PP002D	DP19PP002D	DP29PP002D	DP39PP002D	DP002C01B	DP100C01B
DP09PP005P	DP19PP005P	DP29PP005P	DP39PP005P	DP002C01C	DP100C01C
DP09PP005D	DP19PP005D	DP29PP005D	DP39PP005D	DP002C01D	DP100C01D
DP09PP010P	DP19PP010P	DP29PP010P	DP39PP010P	DP002C01E	DP100C01E
DP09PP010D	DP19PP010D	DP29PP010D	DP39PP010D	DP002C02A	DP100C02A
DP09PP025P	DP19PP025P	DP29PP025P	DP39PP025P	DP002C02B	DP100C02B
DP09PP025D	DP19PP025D	DP29PP025D	DP39PP025D	DP002C02C	DP100C02C
DP09PP050P	DP19PP050P	DP29PP050P	DP39PP050P	DP002C02D	DP100C02D
DP09PP050D	DP19PP050D	DP29PP050D	DP39PP050D	DP002C02E	DP100C02E
DP09PP100P	DP19PP100P	DP29PP100P	DP39PP100P	DP005C01A	DP200C01A
DP09PP100D	DP19PP100D	DP29PP100D	DP39PP100D	DP005C01B	DP200C01B
DP09PP200P	DP19PP200P	DP29PP200P	DP39PP200P	DP005C01C	DP200C01C
DP09PP200D	DP19PP200D	DP29PP200D	DP39PP200D	DP005C01D	DP200C01D
DP09PP400D	DP19PP400D	DP29PP400D	DP39PP400D	DP005C01E	DP200C01E
DP09PP400D	DP19PP400D	DP29PP400D	DP39PP400D	DP005C02A	DP200C02A
DP09PP700D	DP19PP700D	DP29PP700D	DP39PP700D	DP005C02B	DP200C02B
DP09PP700D	DP19PP700D	DP29PP700D	DP39PP700D	DP005C02C	DP200C02C
DP10PP002B	DP20PP002B	DP30PP002B	DP40PP002B	DP005C02D	DP200C02D
DP10PP002C	DP20PP002C	DP30PP002C	DP40PP002C	DP005C02E	DP200C02E
DP10PP002D	DP20PP002D	DP30PP002D	DP40PP002D	DP010C01A	DP400C01A
DP10PP002F	DP20PP002F	DP30PP002F	DP40PP002F	DP010C01B	DP400C01B
DP10PP002P	DP20PP002P	DP30PP002P	DP40PP002P	DP010C01C	DP400C01C
DP10PP002Q	DP20PP002Q	DP30PP002Q	DP40PP002Q	DP010C01D	DP400C01D
DP10PP002R	DP20PP002R	DP30PP002R	DP40PP002R	DP010C01E	DP400C01E
DP10PP005B	DP20PP005B	DP30PP005B	DP40PP005B	DP010C02A	DP400C02A
DP10PP005C	DP20PP005C	DP30PP005C	DP40PP005C	DP010C02B	DP400C02B
DP10PP005D	DP20PP005D	DP30PP005D	DP40PP005D	DP010C02C	DP400C02C
DP10PP005F	DP20PP005F	DP30PP005F	DP40PP005F	DP010C02D	DP400C02D
DP10PP005P	DP20PP005P	DP30PP005P	DP40PP005P	DP010C02E	DP400C02E
DP10PP005Q	DP20PP005Q	DP30PP005Q	DP40PP005Q	DP025C01A	DP700C01A
DP10PP005R	DP20PP005R	DP30PP005R	DP40PP005R	DP025C01B	DP700C01B
DP10PP010B	DP20PP010B	DP30PP010B	DP40PP010B	DP025C01C	DP700C01C
DP10PP010C	DP20PP010C	DP30PP010C	DP40PP010C	DP025C01D	DP700C01D
DP10PP010D	DP20PP010D	DP30PP010D	DP40PP010D	DP025C01E	DP700C01E
DP10PP010F	DP20PP010F	DP30PP010F	DP40PP010F	DP025C02A	DP700C02A
DP10PP010P	DP20PP010P	DP30PP010P	DP40PP010P	DP025C02B	DP700C02B
DP10PP010Q	DP20PP010Q	DP30PP010Q	DP40PP010Q	DP025C02C	DP700C02C
DP10PP010R	DP20PP010R	DP30PP010R	DP40PP010R	DP025C02D	DP700C02D
DP10PP025B	DP20PP025B	DP30PP025B	DP40PP025B	DP025C02E	DP700C02E
DP10PP025C	DP20PP025C	DP30PP025C	DP40PP025C	DP050C01A	DP20PP400C
DP10PP025D	DP20PP025D	DP30PP025D	DP40PP025D	DP050C01B	DP20PP400D
DP10PP025F	DP20PP025F	DP30PP025F	DP40PP025F	DP050C01C	DP20PP400F
DP10PP025P	DP20PP025P	DP30PP025P	DP40PP025P	DP050C01D	DP20PP400P
DP10PP025Q	DP20PP025Q	DP30PP025Q	DP40PP025Q	DP050C01E	DP20PP400Q
DP10PP025R	DP20PP025R	DP30PP025R	DP40PP025R	DP050C02A	DP20PP400R
DP10PP050B	DP20PP050B	DP30PP050B	DP40PP050B	DP050C02B	DP20PP700B
DP10PP050C	DP20PP050C	DP30PP050C	DP40PP050C	DP050C02C	DP20PP700C
DP10PP050D	DP20PP050D	DP30PP050D	DP40PP050D	DP050C02D	DP20PP400D
DP10PP050F	DP20PP050F	DP30PP050F	DP40PP050F	DP050C02E	DP20PP400F
DP10PP050P	DP20PP050P	DP30PP050P	DP40PP050P	DP10PP400C	DP20PP400P
DP10PP050Q	DP20PP050Q	DP30PP050Q	DP40PP050Q	DP10PP400D	DP20PP400Q
DP10PP050R	DP20PP050R	DP30PP050R	DP40PP050R	DP10PP400F	DP20PP400R
DP10PP100B	DP20PP100B	DP30PP100B	DP40PP100B	DP10PP400P	DP30PP400C
DP10PP100C	DP20PP100C	DP30PP100C	DP40PP100C	DP10PP400Q	DP30PP400D
DP10PP100D	DP20PP100D	DP30PP100D	DP40PP100D	DP10PP400R	DP30PP400F
DP10PP100F	DP20PP100F	DP30PP100F	DP40PP100F	DP10PP700B	DP30PP400P
DP10PP100P	DP20PP100P	DP30PP100P	DP40PP100P	DP10PP700C	DP30PP400Q

DP10PP100Q	DP20PP100Q	DP30PP100Q	DP40PP100Q	DP10PP400D	DP30PP400R
DP10PP100R	DP20PP100R	DP30PP100R	DP40PP100R	DP10PP400F	DP30PP700B
DP10PP200B	DP20PP200B	DP30PP200B	DP40PP200B	DP10PP400P	DP30PP700C
DP10PP200C	DP20PP200C	DP30PP200C	DP40PP200C	DP10PP400Q	DP30PP400D
DP10PP200D	DP20PP200D	DP30PP200D	DP40PP200D	DP10PP400R	DP30PP400F
DP10PP200F	DP20PP200F	DP30PP200F	DP40PP200F	DP40PP400C	DP30PP400P
DP10PP200P	DP20PP200P	DP30PP200P	DP40PP200P	DP40PP400D	DP30PP400Q
DP10PP200Q	DP20PP200Q	DP30PP200Q	DP40PP200Q	DP40PP400F	DP30PP400R
DP10PP200R	DP20PP200R	DP30PP200R	DP40PP200R	DP40PP400P	DP40PP400Q
DP10PP400B	DP20PP400B	DP30PP400B	DP40PP400B	DP40PP400Q	DP40PP400R
DP40PP400R	DP40PP700B	DP40PP700C	DP40PP400D	DP40PP400F	DP40PP400P