

Index Plungers with hexagon collar and locking

22120.0206



Product Description

For indexing purposes.

Material

Body

- Free cutting steel, blackened

Locking pin

- Steel, hardened

Knob

- Thermoplastic PA 6, black, dull

Assembly

The screw length can be adapted by distance collars for index plungers (EH 22120.).

Operation

The knob is pulled-out, turned 90° and secured by a notched catch (when locking pin must not project).

More information


Notes

Knob not removable.
Lock nuts have to be purchased separately.

Further products

- Mounting Blocks, for index plungers and index bolts zinc die-cast
- Locating Bushings, for index bolts and index plungers
- Distance Collars, for index plungers

Drawing

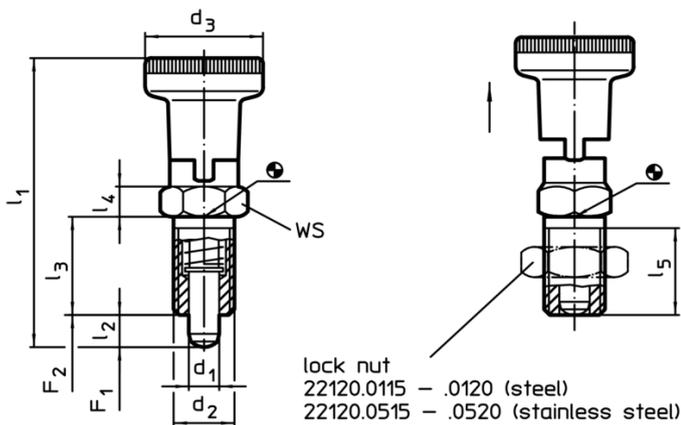

Order information

Dimensions								WS	Spring load ¹⁾		Temperature		Weight	Art. No.
d ₁	d ₂	d ₃	l ₁	l ₂	l ₃	l ₄	l ₅		F ₁	F ₂	min.	max.		
-0,02 -0,04			~	min.			min.	~	~	[°C]		[g]		
[mm]														
Free cutting steel														
6	M12 x 1,5	25	61	6	20	6	17	14	5,5	13	-30	80	36	22120.0206

¹⁾ statistical average value

Accessories

	Dimensions d_2 [mm]	 [g]	Art. No.
lock nuts ISO 8675 (DIN 439) for the following sizes, Steel			
	M12 x 1,5	7,4	22120.0116

Application example

