## DO NOT SCALE PRINT

## **NOTICE**

THIS DRAWING IS THE PROPERTY OF QUALITROL/QUALITROL AKM AND IS LOANED ONLY ON THE CONDITION THAT IT WILL BE USED TO FACILITATE THE PURPOSE FOR WHICH IT WAS INTENDED AND NOT BE REPRODUCED, COPIED OR OTHERWISE DISPOSED OF, AND IS NOT TO BE USED IN WHOLE OR PART FOR FURNISHING INFORMATION RELATIVE TO THE MAKING OF DRAWINGS, PARTS, APPARATUS OR PARTS THEREOF, EXCEPT BY WRITTEN ORDER FROM QUALITROL/QUALITROL AKM.

## **UALITROL.** AKM

Qualitrol and Qualitrol AKM are ISO 9001 system certified companies. Information subject to change without notice.


DRAWING


48515-1

TOLERANCE acc. to ISO.

Applicable where no tolerance is indicated.

For machining: ISO 2768-1m. For threads: ISO 965 External threads 6g Internal threads 6H Surface finish acc. to ISO 1302 Ra 6,3 Machined surfaces. Inspection acc. to IEC 410.



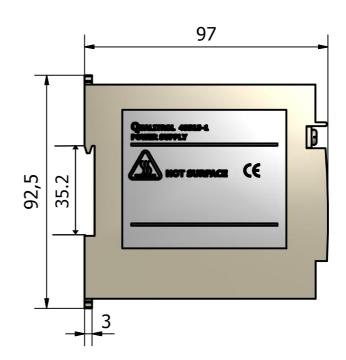

## **Technical Data:**

Input Voltage AC: 100 to 240 VAC 50/60 Hz 0.45A


Input Voltage DC: 90 to 250 VDC 0.3A

Power Rating: 15W Output Voltage: 24VDC **Output Current**: 0.65A

Insultaion Test: 2kV, 50Hz, 60 sec to gnd. Recommended Wire Size: AWG 12-16 Operating Temperature: -10 to +60°C

**Protection Class: IP20** 

Weight: 150 gr



	1							
							TITLE:	
								POWER SUPPLY
04	21/03/13	LABELS UPDATED				20049	MATERIAL:	
03	22/10/12	POWER SUPPLY CHANGED TO NEW MODEL			20049	N/A		
02	090713	RELEASED				01332		
01	080221	NOT RELEASE					FINISH:	
LET	DATE	ALTERATION			C.N.	FINISH:	N/A	
SHEE	т 1о	f 1	DRAWN	P Lindmark	DATE 20/02/2	800	DRAWING	
SCALE	SCALE		CHECK	P Lindmark	20/02/2	800	NO.	48515-1
	1:1	.5	APP'D	A Larsson	20/02/2	008		