


## DMK/C TORQUE LIMITING COUPLINGS WITH SLIDE BEARING



ORDER CODE : DMK/C 160 - 35H7 - 120Nm - b

Type \_\_\_\_\_  
 Size (Nm) \_\_\_\_\_  
 Bore D \_\_\_\_\_  
 Disengagement torque \_\_\_\_\_  
 Overload torque range \_\_\_\_\_

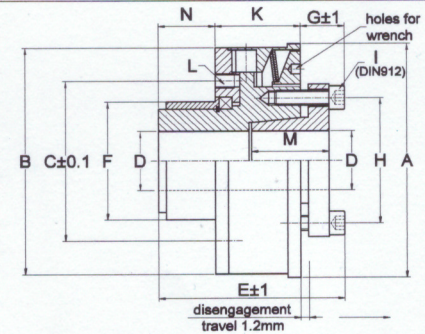

### DIMENSIONS (mm):

Type DMK/C	A	B	C	D		E	F	G	H <sup>(1)</sup>	I	K	L	M	N
				Min H7	Max H7									
DMK/C 30	65	62	46	12 - 20	51	30	13	31	M 4	29	6 x M4 / 6	20	9	
DMK/C 60	75	70	50	15 - 25	61	36	15	37	M 6	30	6 x M6 / 7	25	16	
DMK/C 150	95	92	65	20 - 35	72	48	17	51	M 6	33	6 x M6 / 9	30	22	
DMK/C 200	105	102	70	20 - 40	77	52	17	56	M 6	35.5	6 x M6 / 10	30	25	
DMK/C 300	115	110	76	30 - 46	92	58	21	62	M 8	40	6 x M8 / 12	35	31	
DMK/C 500	129	125	110	35 - 50	112	66	21	70	M 8	58	6 x M8 / 12	38	33	
DMK/C 800	169	165	125	40 - 60	140	90	36	92	M 16	71	6 x M12 / 16	60	33	
DMK/C 1200	169	165	125	40 - 60	140	90	36	92	M 16	71	6 x M 12 / 16	60	33	
DMK/C 1600	195	190	168	60 - 90	159	130	35	115	M 12	78	6 x M 12 / 16	60	46	