

MODEL NUMBER

11-12124-B3


PRODUCT LINE

GO™ Switch 10/20 Series

SPECIFICATIONS

Model	11 Model
Contact Form	SPDT (Form C)
Sensing Range	Extended approx. 9/16" side
Outlet Position	Behind sensing area
Enclosure Material	316L Stainless Steel Enclosure
Area Classification	CSA/FM Cl I, Div 1
Wiring Options	6ft PVC cable
Regional Certification	No regional certification
Custom Field	TopWorx Certified: IP 66/67/68, NEMA 4x/6/6P

WIRING DIAGRAM

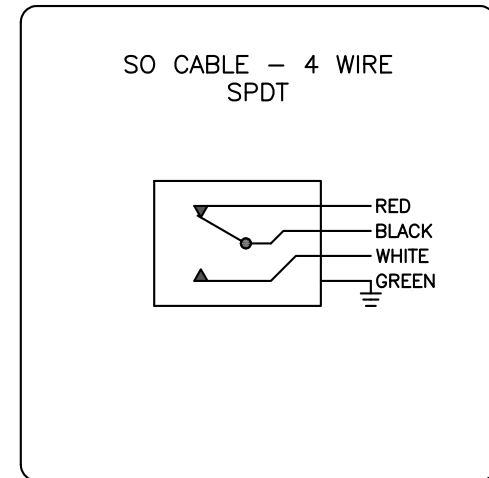

Current as of September 7, 2020 – Subject to change without notice.

NAMEPLATE



CL I DIV 1, GRPS A,B,C,D; CL II DIV 1, GRPS E,F,G, CL III.
 T₁/T₂: 50°C @ T_a: 50°C/80°C
 ELECTRICAL RATING: 120VAC/10A, 24VDC/3A RESISTIVE, 480VAC/24VDC MAX.
 FACTORY SEALED

Model #: _____ Serial #: _____



TOPWORX™

(502)969-8000 PH

3300 Fern Valley
 Louisville, KY