


Conductive Polymer Automotive Potentiometer

TT electronics
AB Electronic Limited

Carpot CP17/583 type

- High performance potentiometer
- Lever operation
- Spring return to zero
- Radial mounting slots
- Packard weatherpack connector
- Glass filled nylon housing

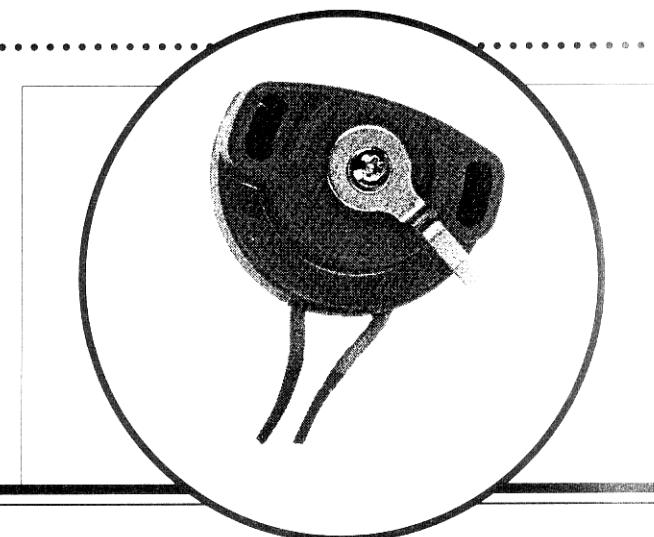

Conductive polymer potentiometer for automotive and other similar demanding applications. A high performance cost effective potentiometer, with long endurance life and protection from engine compartment environment. Termination via 280 mm long leads to a Packard weatherpack 3 pin connector.

Electrical Data

Standard resistance	4000 Ohms +/- 20%
Hysteresis	< 0.3%
Angle of effective rotation	108.25° +/- 4°
Total mechanical rotation	125° +/- 8°
Wiper protection resistor	25% of value
Output signal temperature coefficient	<25 ppm / 0°C
Output smoothness	0.5%
Independent linearity	+/- 2%
Operating temperature	-40°C to +130°C
Operational torque	10 mNm min. / 85 mNm max.
End stop torque	800 mNm maximum
Rotational life	5 x 10 ⁶ cycles

