



**EVRM-NA**  
**EVRM-6NA**

**Safety solenoid valves for gas**  
**Manual reset - Normally open**  
**DN10 ... DN300**

# EVRM-NA

# EVRM-6NA

## Safety solenoid valves for gas

### Manual reset - Normally open

### Contents

|  |    |
|--|----|
| Description .....                        | 2  |
| Features .....                           | 2  |
| Functioning and application .....        | 3  |
| Technical specifications .....           | 4  |
| Gas flow chart (pressure drop) .....     | 6  |
| Ordering information .....               | 8  |
| Special versions and optionals .....     | 8  |
| Design, installation and servicing ..... | 9  |
| Standards and approvals .....            | 10 |

### Description

The EVRM-NA /6NA type valve is a manual reset safety valve that is normally open. The closing function is electrically activated. This type of device, connected to one or more gas leakage detectors, safety thermostat or alarm signals for the presence of carbon monoxide, is suitable to perform locking operations on the gas line.

### Features

The valves are made of aluminum alloy die-cast (or hot-pressed brass for OT versions), with a wide range for inlet/outlet connections from DN10 up to DN 300.

Sealings are made of NBR-based rubber certified for use with gas (EN 549).

Suitable for use with air and non-aggressive gases included in the 1, 2 and 3 families (EN 437). Special versions suitable for aggressive gases, free of non-ferrous metals and with FPM seals.

Pipe connections meet Group 2, according to EN161 requirements.



The whole range can be provided in Ex-proof execution, for use in Zones 2 and 22, according to 2014/34/EU Directive (ATEX).

Two range of operating pressure: low pressure (0...600 mbar) and medium pressure (0...6 bar).

The kind of valves are normally not powered allowing a remarkable energy saving.

An incorporated fine mesh filter protects the valve seat and disc as well as downstream components and prevents dirty contamination (except brass models).

Provided with 1/4" pressure gauge on two sides in the inlet chamber (except brass models), to connect manometers, pressure switches, leakage tester or other gas equipments. Flanged models are provided with gauges also in the outlet chamber.

The encapsulated coil is provided with ISO 4400 plug and suitable cable gland to avoid water and dirty contamination, allowing a safe outdoor installation.

All components are designed to withstand any mechanical, chemical and thermal condition occurring during typical service. Effective impregnation and surface treatments have been used to improve mechanical sturdiness, sealing and resistance to corrosion of the components.

Valves are 100% tested by computerized testing machineries and are fully warranted.

## Functioning and application

The EVRM-NA /6NA type valve is a manual reset safety valve that is normally open. A manual operation is therefore necessary to open the valve and to reset the mechanism consenting to maintain this state. The powering by means of line current and/or condenser discharge, induced by the leakage detector, safety thermostat or alarm system causes driving of the mechanism and consequent closing of the gas orifice. If energizing of the sensor persists because of the presence of gas, the valve remains under power and does not allow reset. When the causes for locking have been eliminated, valve must be opened manually.

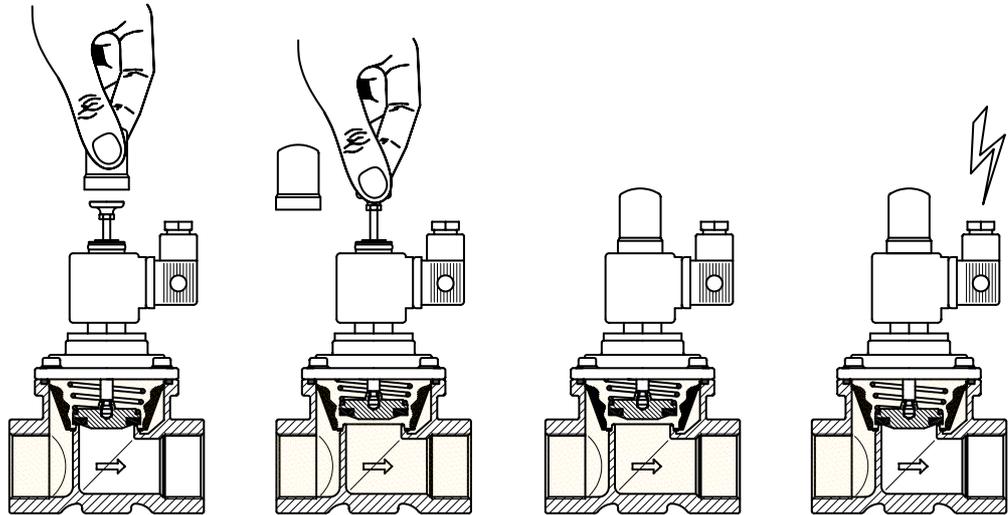


Fig.1



The models from DN125 or bigger and the 6 bar versions are provided with a dual-shutter system for pressure compensation. To open the valve pull the knob for the first step, wait for pressure compensation, and then pull the knob completely up to full resetting.

This kind of device is normally installed downstream a manual shut-off valve and upstream of the gas regulating train. Figure 2 shows a example of installation.

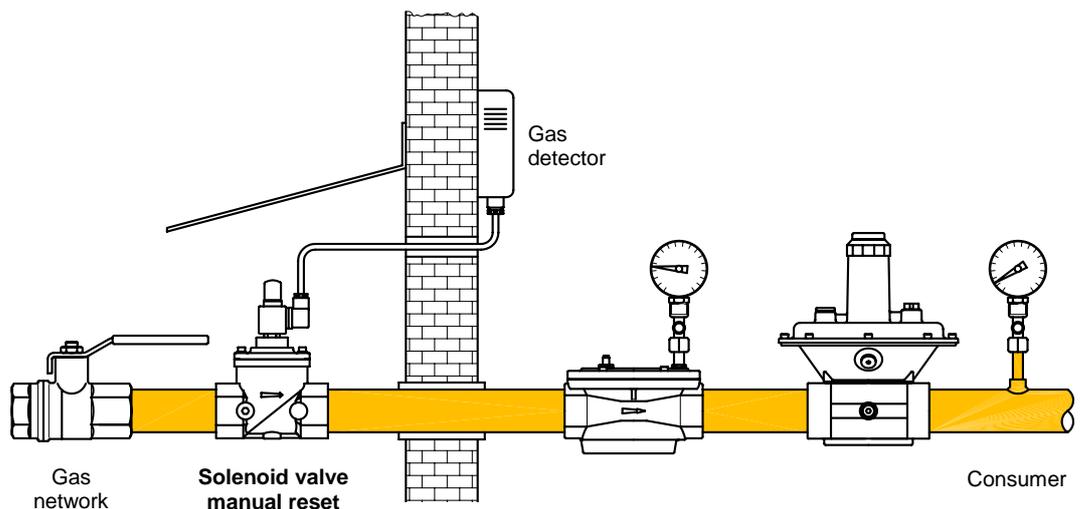


Fig.2

## Technical specifications

Tab. 1

|  |  |
|--|--|
| <b>Connections</b>                               | Internal threaded ISO 7-1 from Rp3/8 to Rp2½ or ANSI-ASME B1.20 from 3/8"NPT to 2"½NPT<br>Flanged ISO 7005 PN16 from DN40 to DN300 or ANSI-ASA-ASME B16.5 class 150 from 2" to 10" |
| <b>Voltage ratings</b>                           | 230 VAC 50/60 Hz<br>110 VAC 50/60 Hz<br>24 VAC; 24 VDC<br>12 VDC   |
| <b>Voltage tolerance</b>                         | -15% to +10%   |
| <b>Ambient temperature<br/>Media temperature</b> | -20°C to +60°C (-4°F to +140°F)  |
| <b>Max. operating pressure</b>                   | 600 mbar (9 psig)<br>6 bar * (90 psig)   |
| <b>Body test pressure</b>                        | 1 bar (15 psig)<br>9 bar * (130 psig)  |
| <b>Closing time</b>                              | < 1 second   |
| <b>Gas strainer</b>                              | 600 µm (0,02 in), metal mesh<br>(except brass models)  |
| <b>Enclosure</b>                                 | IP54 (NEMA 3)<br>(IP65 opzionale NEMA 4)   |
| <b>Cable gland</b>                               | PG 9   |
| <b>Wires cross-section</b>                       | 1,5 mm <sup>2</sup> max. (AWG 14)  |
| <b>Electrical safety</b>                         | Class I (EN 60335-1)   |
| <b>Coil winding insulation</b>                   | Class H (200°C, 392°F)   |
| <b>Coil thermal resistance</b>                   | Class F (155°C, 311°F)   |

Tab. 2

### Power consumption

| [W]          | 230V | 110-120V | 24V    | 12V    |
|--------------|------|----------|--------|--------|
| 3/8"-1/2" OT | 16   | 16       | 12(22) | 12(22) |
| 3/4" OT      | 16   | 16       | 12(22) | 12(22) |
| 1" OT        | 16   | 16       | 12(22) | 12(22) |
| 3/8"-1/2"    | 16   | 16       | 12(22) | 12(22) |
| 3/4"-1"      | 16   | 16       | 12(22) | 12(22) |
| 1"¼-1"½-2"   | 16   | 16       | 12(22) | 12(22) |
| 2"½-3"       | 19   | 19       | 20     | 20     |
| 4"           | 19   | 19       | 20     | 20     |
| 5"- 6"       | 19   | 19       | 20     | 20     |
| 8"           | 19   | 19       | 20     | 20     |
| 10"          | 19   | 19       | 20     | 20     |
| 12"          | 19   | 19       | 20     | 20     |

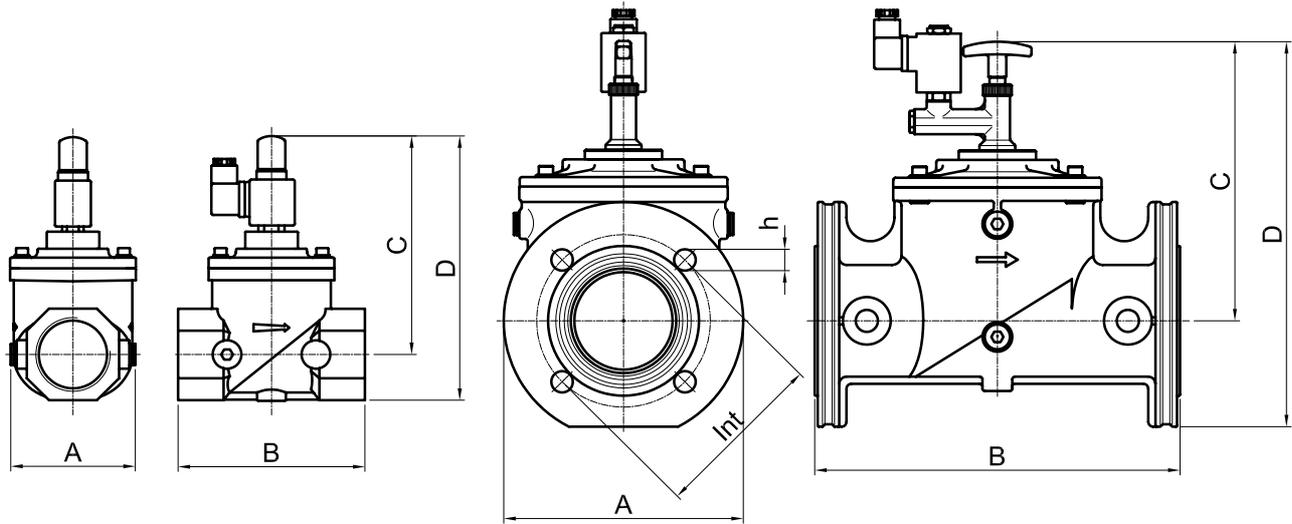


Fig.3

Tab. 3

| Material and connections |      | Overall dimensions [mm]<br>[in] |            |                |                |            |              | Weight [Kg]<br>[lbs] |
|--------------------------|------|---------------------------------|------------|----------------|----------------|------------|--------------|----------------------|
| CuZn                     | AlSi | A                               | B          | C <sup>2</sup> | D <sup>2</sup> | Int        | h            |                      |
| <b>Rp 3/8</b>            |      | <b>30</b>                       | <b>58</b>  | <b>115</b>     | <b>130</b>     |            |              | <b>0,4</b>           |
| 3/8"NPT                  |      | 1,18                            | 2,28       | 4,53           | 5,12           |            |              | 0,9                  |
| <b>Rp 1/2</b>            |      | <b>30</b>                       | <b>58</b>  | <b>115</b>     | <b>130</b>     |            |              | <b>0,4</b>           |
| 1/2"NPT                  |      | 1,18                            | 2,28       | 4,53           | 5,12           |            |              | 0,9                  |
| <b>G 3/4</b>             |      | <b>35</b>                       | <b>55</b>  | <b>113</b>     | <b>130</b>     |            |              | <b>0,6</b>           |
| 3/4"NPT                  |      | 1,38                            | 2,17       | 4,45           | 5,12           |            |              | 1,3                  |
| <b>G 1</b>               |      | <b>40</b>                       | <b>62</b>  | <b>115</b>     | <b>135</b>     |            |              | <b>0,7</b>           |
| 1"NPT                    |      | 1,57                            | 2,44       | 4,53           | 5,31           |            |              | 1,5                  |
| <b>Rp 3/8</b>            |      | <b>70</b>                       | <b>77</b>  | <b>139</b>     | <b>155</b>     |            |              | <b>0,6</b>           |
| 3/8"NPT                  |      | 2,76                            | 3,03       | 5,47           | 6,10           |            |              | 1,3                  |
| <b>Rp 1/2</b>            |      | <b>70</b>                       | <b>77</b>  | <b>139</b>     | <b>155</b>     |            |              | <b>0,6</b>           |
| 1/2"NPT                  |      | 2,76                            | 3,03       | 5,47           | 6,10           |            |              | 1,3                  |
| <b>Rp 3/4</b>            |      | <b>85</b>                       | <b>96</b>  | <b>146</b>     | <b>169</b>     |            |              | <b>0,8</b>           |
| 3/4"NPT                  |      | 3,35                            | 3,78       | 5,75           | 6,65           |            |              | 1,8                  |
| <b>Rp 1</b>              |      | <b>85</b>                       | <b>96</b>  | <b>146</b>     | <b>169</b>     |            |              | <b>0,8</b>           |
| 1"NPT                    |      | 3,35                            | 3,78       | 5,75           | 6,65           |            |              | 1,8                  |
| <b>Rp 1 1/4</b>          |      | <b>120</b>                      | <b>153</b> | <b>170</b>     | <b>203</b>     |            |              | <b>1,6</b>           |
| 1 1/4"NPT                |      | 4,72                            | 6,02       | 6,69           | 7,99           |            |              | 3,5                  |
| <b>Rp 1 1/2</b>          |      | <b>120</b>                      | <b>153</b> | <b>170</b>     | <b>203</b>     |            |              | <b>1,6</b>           |
| 1 1/2"NPT                |      | 4,72                            | 6,02       | 6,69           | 7,99           |            |              | 3,5                  |
| <b>Rp 2</b>              |      | <b>106</b>                      | <b>156</b> | <b>175</b>     | <b>213</b>     |            |              | <b>1,9</b>           |
| 2"NPT                    |      | 4,17                            | 6,14       | 6,89           | 8,39           |            |              | 4,2                  |
| <b>Rp 2 1/2</b>          |      | <b>175</b>                      | <b>218</b> | <b>252</b>     | <b>300</b>     |            |              | <b>3,3</b>           |
| 2 1/2"NPT                |      | 6,89                            | 8,58       | 9,92           | 11,81          |            |              | 7,3                  |
| <b>DN 40<sup>1</sup></b> |      | <b>150</b>                      | <b>193</b> | <b>170</b>     | <b>245</b>     | <b>110</b> | <b>4x18</b>  | <b>3,9</b>           |
|                          |      | 5,91                            | 7,60       | 6,69           | 9,65           |            |              | 8,6                  |
| <b>DN 50<sup>1</sup></b> |      | <b>165</b>                      | <b>196</b> | <b>175</b>     | <b>257</b>     | <b>125</b> | <b>4x18</b>  | <b>6,1</b>           |
| 3"ANSI                   |      | 6,50                            | 7,72       | 6,89           | 10,12          | 4,75       | 4x3/4        | 13,4                 |
| <b>DN 65</b>             |      | <b>200</b>                      | <b>305</b> | <b>252</b>     | <b>341</b>     | <b>145</b> | <b>4x18</b>  | <b>8,2</b>           |
| 2 1/2"ANSI               |      | 7,87                            | 12,01      | 9,92           | 13,43          | 5,50       | 4x3/4        | 18                   |
| <b>DN 80</b>             |      | <b>200</b>                      | <b>305</b> | <b>252</b>     | <b>341</b>     | <b>160</b> | <b>8x18</b>  | <b>8,2</b>           |
| 3"ANSI                   |      | 7,87                            | 12,01      | 9,92           | 13,43          | 6,00       | 4x3/4        | 18                   |
| <b>DN 100</b>            |      | <b>252</b>                      | <b>350</b> | <b>280</b>     | <b>380</b>     | <b>180</b> | <b>8x18</b>  | <b>16</b>            |
| 4"ANSI                   |      | 9,92                            | 13,78      | 11,02          | 14,96          | 7,50       | 8x3/4        | 35                   |
| <b>DN 125</b>            |      | <b>310</b>                      | <b>460</b> | <b>331</b>     | <b>501</b>     | <b>210</b> | <b>8x18</b>  | <b>28</b>            |
| 5"ANSI                   |      | 12,20                           | 18,11      | 13,03          | 19,72          | 8,50       | 8x7/8        | 62                   |
| <b>DN 150</b>            |      | <b>310</b>                      | <b>460</b> | <b>331</b>     | <b>501</b>     | <b>240</b> | <b>8x23</b>  | <b>30</b>            |
| 6"ANSI                   |      | 12,20                           | 18,11      | 13,03          | 19,72          | 9,50       | 8x7/8        | 66                   |
| <b>DN 200</b>            |      | <b>370</b>                      | <b>546</b> | <b>372</b>     | <b>585</b>     | <b>295</b> | <b>12x23</b> | <b>45</b>            |
| 8"ANSI                   |      | 14,57                           | 21,50      | 14,65          | 23,03          | 11,75      | 8x7/8        | 99                   |
| <b>DN 250</b>            |      | <b>405</b>                      | <b>600</b> | <b>453</b>     | <b>680</b>     | <b>355</b> | <b>12x28</b> | <b>72</b>            |
| 10"ANSI                  |      | 15,94                           | 23,62      | 17,83          | 26,77          | 14,25      | 12x1         | 159                  |
| <b>DN 300</b>            |      | <b>460</b>                      | <b>700</b> | <b>500</b>     | <b>763</b>     | <b>410</b> | <b>12x28</b> | <b>99</b>            |
|                          |      | 18,11                           | 27,56      | 19,69          | 30,04          |            |              | 218                  |

(<sup>1</sup>) Optional kit    (<sup>2</sup>) Valve open

### Gas flow chart

(Pressure drop)

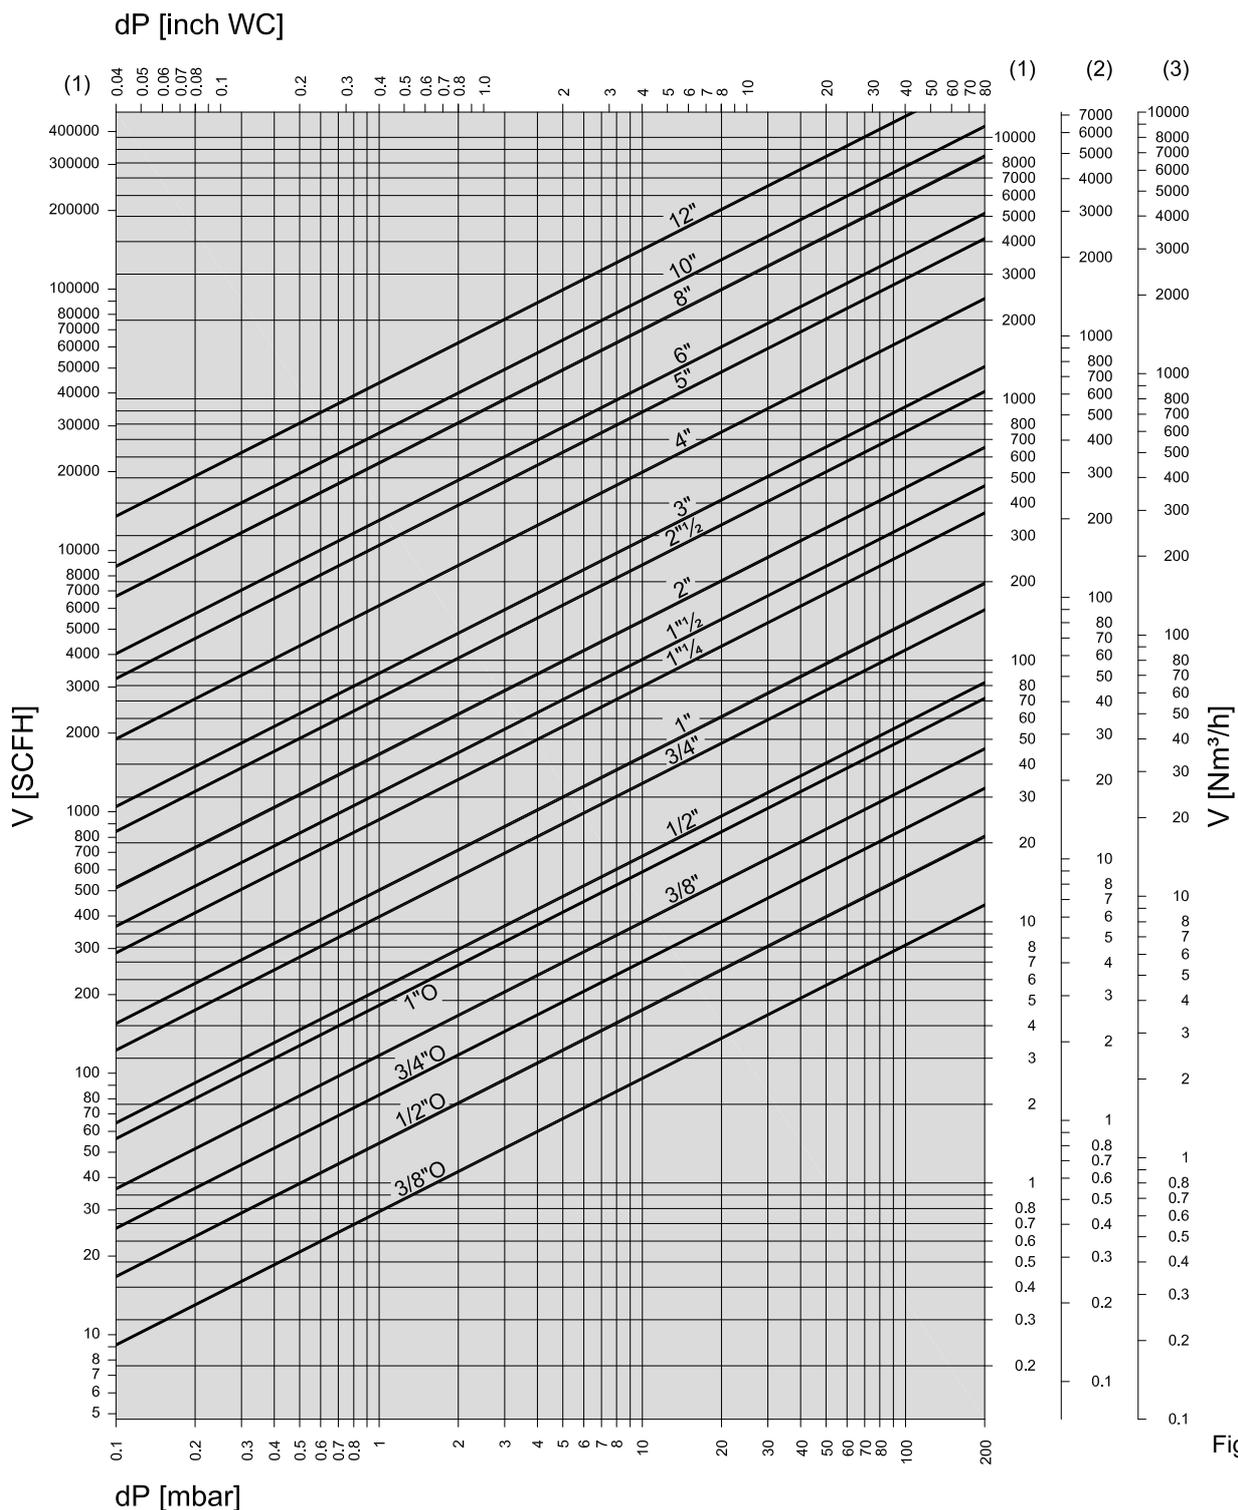


Fig. 4

### Formula of conversion from air to other gases

$$V_{GAS} = k \cdot V_{AIR}$$

Tab. 4

| Gas type        | Specific gravity<br>$\rho$<br>[Kg/m³] | $k = \sqrt{\frac{1.25}{\rho_{GAS}}}$ |
|-----------------|---------------------------------------|--------------------------------------|
| (1) Natural gas | 0,80                                  | 1,25                                 |
| (2) LPG         | 2,08                                  | 0,77                                 |
| (3) Air         | 1,25                                  | 1,00                                 |

15°C, 1013 mbar, dry

When the flow read on the diagram is referred to operating pressure instead of standard conditions, the pressure drop  $\Delta p$  read on the diagram must be multiplied for the factor: (1+ relative pressure in bar)

*Example:*

In the 2" solenoid valve with an air flow of 80 Nm<sup>3</sup>/h there is a pressure drop  $\Delta p = 5$  mbar. If we consider that 80 m<sup>3</sup>/h is the flow at 200 mbar of inlet pressure, then the pressure drop to be consider is:

$$\Delta p = 5 \times (1 + 0,2) = 6 \text{ mbar}$$

Normally, pressure drop and flow rate for the valves are read from the gas flow diagram. However, the valves can also be chosen in accordance with the characteristic "Kvs value" which is shown in table 5.

The selection of the valve requires the calculation of the Kv under the operating conditions.

Considering only subcritical pressure drops:

$$\Delta p < \frac{p_1}{2}$$

Kv can be calculated with the formula:

$$Kv = \frac{V}{514} \sqrt{\frac{\rho(t + 273)}{\Delta p \cdot p_2}}$$

where

- V = flow rate [Nm<sup>3</sup>/h]
- Kv = flow factor [m<sup>3</sup>/h]
- $\rho$  = density [Kg/m<sup>3</sup>]
- p<sub>1</sub> = absolute inlet pressure [bar]
- p<sub>2</sub> = absolute outlet pressure [bar]
- $\Delta p$  = differential pressure p<sub>1</sub>-p<sub>2</sub> [bar]
- t = media temperature [°C]

To the Kv value calculated from operating conditions we add an allowance of 20%, to obtain the minimum Kvs value which the valve should have:

**Kvs > 1,2 Kv**

Tab. 5

| Kvs               | 3/8"O | 1/2"O | 3/4"O | 1"O | 3/8" | 1/2" | 3/4" | 1" | 1"¼ | 1"½ | 2" | 2"½ |
|-------------------|-------|-------|-------|-----|------|------|------|----|-----|-----|----|-----|
| m <sup>3</sup> /h | 0,7   | 1,3   | 2,0   | 4,5 | 2,9  | 4,8  | 9,5  | 12 | 22  | 29  | 40 | 65  |

|                   | DN65 | DN80 | DN100 | DN125 | DN150 | DN200 | DN250 | DN300 |
|-------------------|------|------|-------|-------|-------|-------|-------|-------|
| m <sup>3</sup> /h | 65   | 80   | 148   | 250   | 315   | 516   | 660   | 1020  |



Valve must be selected considering the following:

- Pressure drops  $\Delta p \leq 0,1 p_1$  are recommended and  $\Delta p > p_1/2$  are always unadvisable
- Flow velocities  $w \leq 15$  m/s are recommended and  $w > 50$  m/s are always unadvisable.

## Ordering information

Tab.6

|                                |              |  |            |          |           |          |                   |
|--------------------------------|--------------|--|------------|----------|-----------|----------|-------------------|
|                                | <b>EVRM-</b> | <b>6NA</b>                               | <b>4</b>   | <b>N</b> | <b>.B</b> | <b>J</b> |                   |
| <b>Valve type</b>              |              |  |            |          |           |          |                   |
| <b>Max. Operating pressure</b> |              |  |            |          |           |          |                   |
| -NA                            |              |  |            |          |           |          | 600 mbar (9 psig) |
| -6NA                           |              |  |            |          |           |          | 6 bar (90 psig)   |
| <b>Size</b>                    |              |  |            |          |           |          |                   |
| 00T                            | 3/8"         | brass body                               |            |          |           |          |                   |
| 10T                            | 1/2"         | brass body                               |            |          |           |          |                   |
| 20T                            | 3/4"         | brass body                               |            |          |           |          |                   |
| 30T                            | 1"           | brass body                               |            |          |           |          |                   |
| <b>0</b>                       | 3/8"         |  | <b>8</b>   | 3"       |           |          |                   |
| <b>1</b>                       | 1/2"         |  | <b>9</b>   | 4"       |           |          |                   |
| <b>2</b>                       | 3/4"         |  | <b>93</b>  | 5"       |           |          |                   |
| <b>3</b>                       | 1"           |  | <b>95</b>  | 6"       |           |          |                   |
| <b>35</b>                      | 1 1/4"       |  | <b>98</b>  | 8"       |           |          |                   |
| <b>4</b>                       | 1 1/2"       |  | <b>910</b> | 10"      |           |          |                   |
| <b>6</b>                       | 2"           |  | <b>912</b> | 12"      |           |          |                   |
| <b>7</b>                       | 2 1/2"       |  |            |          |           |          |                   |
| <b>Connection</b>              |              |  |            |          |           |          |                   |
| none                           |              | Rp internal thread / ISO flange          |            |          |           |          |                   |
| N                              |              | NPT internal thread / ANSI flange        |            |          |           |          |                   |
| T                              |              | Threaded (Rp2"½ only)                    |            |          |           |          |                   |
| <b>Supply voltage</b>          |              |  |            |          |           |          |                   |
| none                           |              | 230V 50/60Hz                             |            |          |           |          |                   |
| B                              |              | 110V-120V 50/60Hz                        |            |          |           |          |                   |
| C                              |              | 24V AC/DC <sup>(1)</sup>                 |            |          |           |          |                   |
| G                              |              | 24V DC                                   |            |          |           |          |                   |
| GW                             |              | 24V DC 22W                               |            |          |           |          |                   |
| H                              |              | 12V DC                                   |            |          |           |          |                   |
| HW                             |              | 12V DC 12W <sup>(2)</sup>                |            |          |           |          |                   |
| <b>Special versions</b>        |              |  |            |          |           |          |                   |
| J                              |              | Biogas                                   |            |          |           |          |                   |
| S                              |              | Without inner piston for indirect acting |            |          |           |          |                   |

<sup>(1)</sup> DC operation with impulse only<sup>(2)</sup> Provided with different mechanical parts (not interchangeable)

## Special versions and optionals

J-version: the models with aluminum body from 3/8" to 6" can be supplied in special versions for aggressive gases such as biogas, they are free of non-ferrous metals in contact with gas and provided with special seals.

S-version: the models from 5" to 12" can be supplied without the inner piston for indirect acting.

The sizes 1 1/4", 1 1/2" and 2" can be provided with 1/4" gauges also in the outlet chamber.

A closed position indicator micro-switch (CPI) can be installed. Models from DN65 to DN300 are provided with G1/8 connection on the bottom for these facilities -on request from 3/8" to 2" - (not available for brass models).

The threaded models 1 1/2" and 2" can be provided with flanged connections using an optional kit.

All the valves can be provided with anodizing housing or epoxy coating to withstand the aggressive environments.

The whole range can be provided with a special cable gland and Ex-proof marking for use in Zones 2 and 22, according to 2014/34/EU Directive (ATEX):

|                 |   |
|-----------------|---|
| category        | II 3 G,D  |
| protection mode | Ex nA IIA T4 Gc X<br>Ex tc IIIB T135°C Dc X or<br>Ex tc IIIC T135°C Dc X (IP65) |

## Design, installation and servicing

To assure a proper and safe operation, as well as a long service life of the valve, consider the following recommendations during the design of the system where the valve will be installed:



- ✓ Ensure that all the features of your system comply with the specifications of the valve (gas type, operating pressure, flow rate, ambient temperature, electrical voltage, etc.).
- ✓ Valve may be mounted with coil in horizontal or vertical position, not upside down.
- ✓ In the event of vertical pipe, the flow direction should be from bottom to top.
- ✓ After removing the end caps make sure no foreign body will enter into the valve during handling or installation (e.g. swarf or excessive sealing agent).
- ✓ A gas filter should be always installed upstream the valve.
- ✓ Ensure that installing area is protected from rain and water splashes or drops.
- ✓ Never install the valve close to walls or other equipments.
- ✓ Perform leak and functional tests after mounting (max. testing pressure 1,5 Pmax).
- ✓ Check proper operation at least once a year (most often for aggressive gases).
- ✓ Due to seals aging, to ensure safe operation, we recommend the valve replacement after 10 years from the date of manufacture stamped on the product.
- ✓ This control must be installed in compliance with the rules in force.
- ✓ Make sure all works are performed by qualified technicians only and in compliance with local and national codes.
- ✓ To prevent product damage and dangerous situations, read carefully the instructions supplied with the product before use.

For more details see the Installation and Service Instructions.



## Standards and approvals

The product complies with the essential requirements of the following European Directives and their amendments:



2014/68/EU (Pressure Equipment Directive)  
 2014/34/EU (ATEX) when shown upon the product  
 2014/30/EU (Electromagnetic Compatibility)  
 2014/35/EU (Low Voltage Directive)  
 2011/65/EU (RoHS II)

**CE-Reg.-No. PED/0497/2663/13**



The product complies with the Technical Regulations TP TC 004/2011-016/2011-020/2011-032/2013 of Russia, Belarus and Kazakhstan.

Declaration of Conformity: **№ RU Д-IT.PA01.B.08271/18**

**Quality Management System is certified according to UNI EN ISO 9001.**



Elektrogas is a brand name of:

Elettromeccanica Delta S.p.A.  
 Via Trieste 132  
 31030 Arcade (TV) – ITALY

The information in this document contains general descriptions of technical options available and based on current specifications.

The company reserves the right to make changes in specifications and models as design improvements are introduced, without prior notice.

tel +39 0422 874068  
 fax +39 0422 874048  
[www.delta-elektrogas.com](http://www.delta-elektrogas.com)  
[info@delta-elektrogas.com](mailto:info@delta-elektrogas.com)

Copyright © 2019  
 All rights reserved