




SPV 5.0 C [SPV060C04B06AA]

3 PH - 6 poles - 1000 RPM - 220-240/380-415 V - 50 Hz

Working moment [Kg*cm]	Unbalance [Kg*cm]	Centrifugal force [Kg]	Nominal voltage [V]	Input power [kW]	Current [A]	Power factor	Ia/In
104	52	580	220-240/380-415	0,8	Δ 2,94 Y 1,7	0,68	4

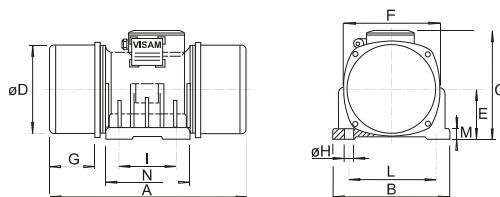

*Technical drawings are illustrative purposes only, please refer to 2D/3D drawings available on "FINDER" app.
Contact us for more information.

OVERALL DIMENSIONS [mm]													
Weight [Kg]	H	I	L	Holes number	A	B	C	E	F	G	N	P	Q
37	17	120	180	4	452	225	187	105	200	105	210	70	50

TECHNICAL FEATURES						
Type of grease	Greased for life	Screw	Washer	Clamping torque [Nm]	Cable type	Cable gland
/	No	M16	17 x 30 mm	185	/	/

BEARINGS				
Bearing model	Type	Life 100%	Life 80%	Life 50%
NJ 2206		>100000	>100000	>100000

CERTIFICATION	
Atex II 3D Ex tc IIIC T140°C IP66	

REV.2-22/05/2019